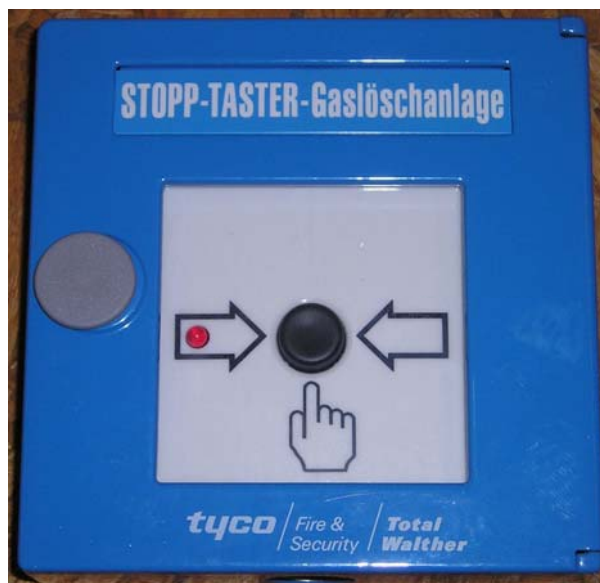


**Stop Push Button HM/5/11/18/17**

- Conventional Line Device
- Rough Aluminium Case
- Optical Indication with LED
- Large space for Label
- Increase of IP-protection to IP54 with optional kit

**Description:**

The stop push button is designed according EN54-11/B and EN12094-3 for use on a conventional line. The stop push button consists of a rough aluminium case which is high resistant against environmental influence. Also after years of use it is stable in form, unbreakable and no change of colour when exposed to sunlight.

The stop push button has an optical LED indicator for activation.

The swing door opens 180° and is equipped with a removable glass plate.

Special versions in colour, design, function and internal circuits are available on request. With an optional kit (HFM/HM-ZS-IP54) the IP-protection can be increased to IP54.

**Technical Data:**

Operating voltage:	Supply from the Line
Ambient temperature:	-20°C to +60°C (continuous operation) -25°C to +70°C (max. 12 hours)
Protection grade:	IP42, can be increased to IP54
Dimensions:	125 x 125 x 34 (mm)
Colour:	blue, RAL5015
Weight:	400g
Approval:	VdS G207160
Part-No.:	K0 246 917 0
Part-No. IP54 kit:	K0 246 915 0

The last number of the type designation marks the branding: 17 = TFS / Total Walther