



Galaxy Dimension combines the best intrusion features with advanced access control functions in a single, integrated system. Installing and programming a full security system becomes easier, quicker and more efficient. With only one system to install and maintain, one point of contact for Technical Support and one training session for the complete system, there are savings in both time and money.

Offering this Non PC based access control system for small industrial & commercial premises provides a user friendly system with upgrade facility to intergrated & intruder & access control at a later date.

The combined intrusion and access system offers the end user a system which retains maximum convenience whilst maintaining the highest level of security at all time.

Galaxy Dimension

Non PC Networked Access Control Solution


Features

- Up to 64 doors controlled.
- Area based integrated access and intrusion control. No access if area is set. Prevents false alarms.
- Up to 1000 users.
- Access event log with 1000 events recorded in panel (separate intruder log).
- Uses Mifare 34bit* or industry standard 26 bit readers
- Fully customisable weekly schedules to control access, auto-setting and output functions.
- Up to 32 yearly holiday schedules each with 20 periods.
- User's access controlled by access templates and group set status.
- Area behind a door is unset automatically upon access if user has authority. This prevents false alarms due to failure to unset.
- Groups can be set by pressing the Menu Recall button before card swipe, or by triple swipe.
- A system keypad can be linked to each reader for Menu Recall function control.
- Evacuation control will allow doors to unlock in the event of fire.
- DCM modules available in compact plastic box or combined with a PSU and RIO expansion module in a metal box for installation convenience.

*Tyco 34 bit format

SPECIFICATIONS

Maximum configuration				
Device/Panel	GD-48	GD-96	GD-264	GD-520
Keyproxes	3	7	7	24
DCM's	4	16	16	32
DCM controlled doors	8	32	32	64
Ordering				
CPO38	LCD keypad with built-in badge reader (MK7 Galaxy keyprox)			
C080	Dual door controller (DCM) in stand-alone box			
C081	Dual door controller (DCM) with Power Supply Unit (12V-2,75A) and RIO in a metallic case			

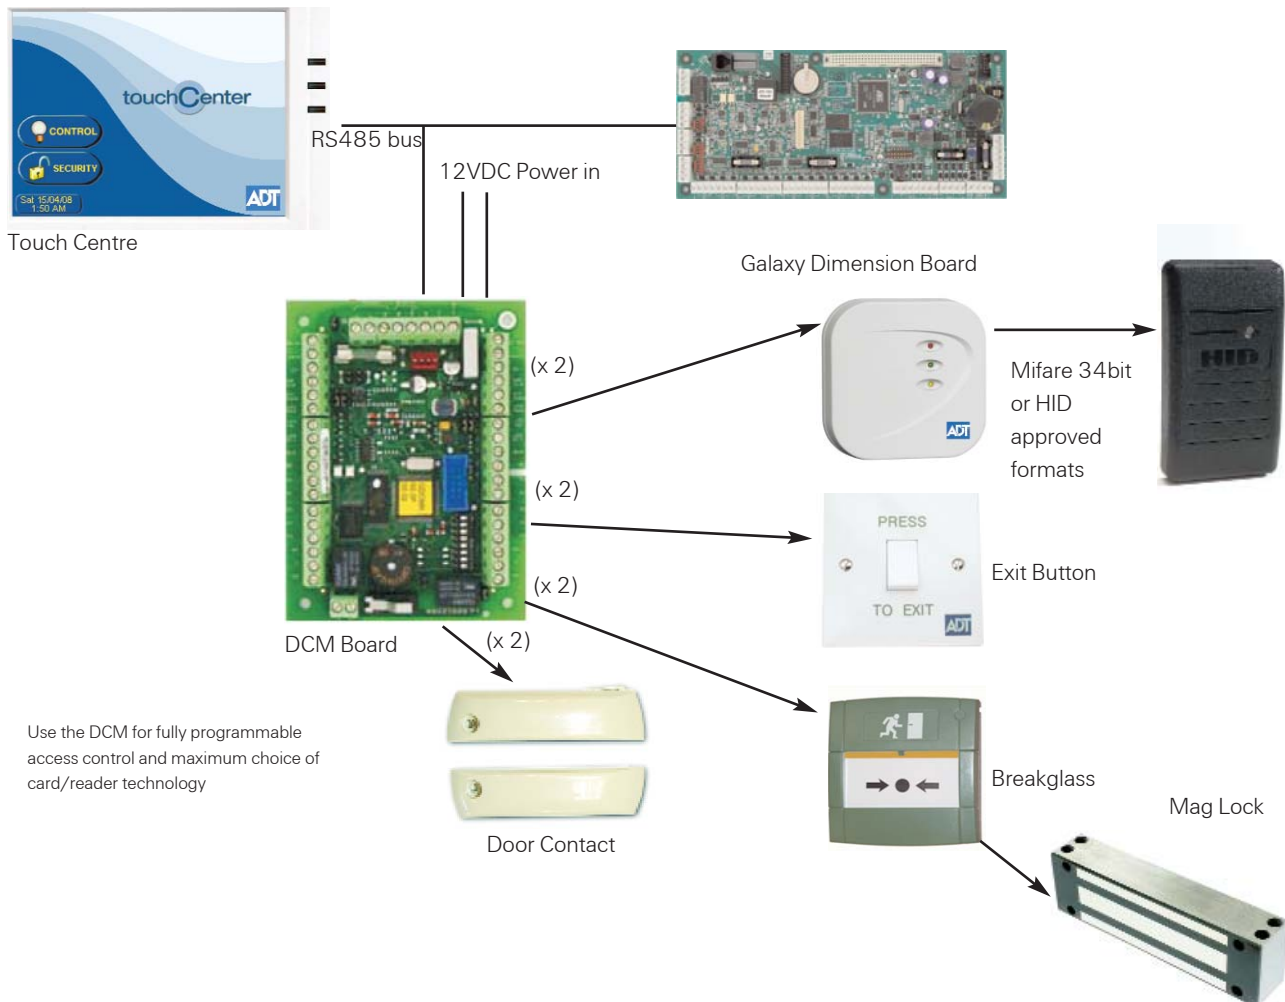

For further information on how we can help you please visit our website at www.tycofis.com or e-mail us on tycofis@tycoint.com. The right is reserved to modify or withdraw any product or service without notice. PSAC434TFIS Issue 1 October 2008© 2008

tyco

Fire & Integrated Solutions

a vital part of your world