



ADQUAD27 and ADQUAD77 Series

Standard Digital Quads

Features:

- View up to four live cameras simultaneously in quad screen, one camera full screen or sequenced images on live display monitor
- View real-time images on live monitor while recording to VCR
- Unmatched clarity with 512 x 512 high resolution digital pixel images to display monitor and VCR
- Automatic sequential switching with variable dwell and camera selection
- 30 fields/second real-time refresh rate
- Easy setup and operation via front panel pushbutton controls
- Time, date and camera title displays in quad mode and on live monitor and playback
- Adjustable video gain control for each camera to maximize image quality
- Comprehensive alarm features plus universal alarm, video loss indication, and security lockout

The ADQUAD27 and ADQUAD77 Series Standard Digital Quads provide live display options during quad recording, comprehensive alarm capabilities, and the operational functions that users want most. These quads offer the performance, flexibility and control demanded by today's security professionals.

View up to four live cameras simultaneously, sequence through all or selected cameras, or select one camera for full-screen display while recording to VCR or DVR in quad format. Comprehensive alarm features include full screen display of alarmed camera, programmable duration, alarm disable, alarm output and audible alert. Quickly access time, date, camera title and other functions via two-screen setup menu.

Simple operation, superior performance and all the right features make American Dynamics Robot family of Standard Digital Quads the value driven choice.



ADT Always There®

ADQUAD27 and ADQUAD77 Series

DATA SHEET

Specifications

Model Numbers

ADQUAD27	4 channel, B/W, EIA version
ADQUAD27-1	4 channel, B/W, CCIR version
ADQUAD77-1	4 channel, colour, PAL version

Operational

Video Standard	PAL/CCIR	625 lines, 50 fields/second
Video Input	Four, 1.0 Vp-p, composite video	
Monitor Output	1.0 Vp-p composite video	
VCR Input	1.0 Vp-p, 75 Ohms, BNC	
VCR Output	1.0 Vp-p, composite, 75 Ohms, BNC	
Video Resolution	ADQUAD27 and ADQUAD27-1	512 x 512 pixels full screen to display and VCR 8 bit luma, 256 shades of grey
	ADQUAD77 and ADQUAD77-1	1024 x 512 pixels full screen to display and 24-bit chroma, over 16 million colours on palette
Display Rate	Real-Time, 30 fields per second	
Alarm Input	Four, programmable as normal open or normally closed, enable/disable	

Alarm Output	Form-C, 2A @ 30 VDC or 1A @ 125 VAC, Resistive
Alarm I/O Connector	One, DB9
Alarm Duration	Programmable 0 seconds to 59 minutes or continuous, 4 second default
Operating Power	12 VDC, 10 watts 2.1 mm pin jack

Mechanical

Unit Weight	1.8 kg
Shipping Weight	3.2 kg
Dimensions	44 x 216 x 311 mm
Operating Temperature	0° to 45° C


Regulatory

Emissions	FCC Part 15, Subpart B, Class B EN55022 Class B
Immunity	EN50081-1, EN61000-3-2, -3-3 EN50082-1, IEC1000-4-2, -4-3, -4-4
Safety	EN60950 (1992), Amendments 1 and 2

Accessories

RM06	Single Rack Mount Kit
RM07	Dual Rack Mount Kit

Basic System Diagram

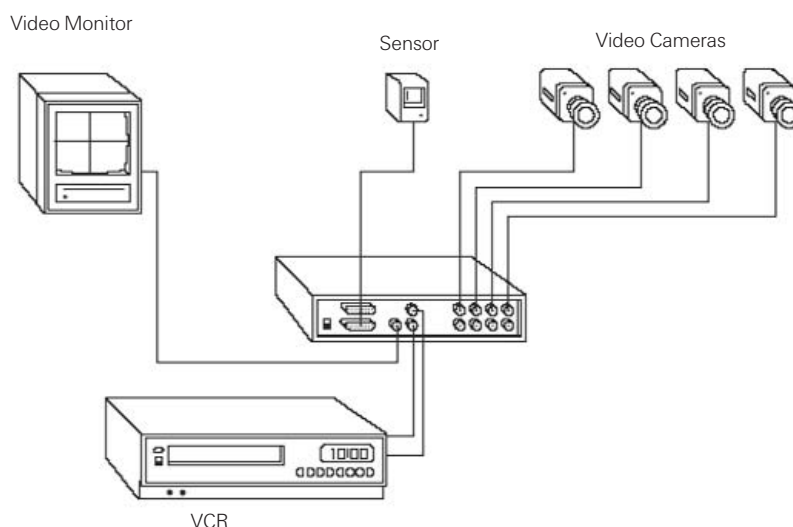

For further information on how ADT can help you, contact your local office or phone free on **0800 010 999** or visit us at www.adt.co.uk

CE

Head Office: ADT Fire and Security plc, Security House, The Summit, Hanworth Road, Sunbury-on-Thames, Middlesex TW16 5DB.
ADT and ADT Always There is a registered trademark of ADT Services AG and used under license.
ADT reserves the right to modify or withdraw any product or service without notice.

Ref No PSS061A Issue 2 October 2006

© 2006 Tyco International



ADT Always There®