

## AD Auto Iris Lenses



### Features:

- 1/3-inch, 1/2-inch
- C and CS mount versions
- Colour corrected optics
- High quality, compact design
- Fixed and variable focal lengths
- Right angle and straight pinhole versions
- Neutral Density (ND) Filters

AD auto iris lenses are used to produce consistent video signals from cameras that view scenes with varying light levels. The use of auto iris lenses enables reliable surveillance in areas which would otherwise be compromised.

The "LD" DC iris series relies upon the circuitry contained within suitably equipped cameras that produce a DC output. This circuitry will, in turn, adjust the lens iris accordingly. The use of "LD" lenses with AD cameras offers a lower cost alternative to traditional auto iris lenses.

Pinhole lenses are available in straight or right angle configurations for covert applications where the use of standard diameter lenses would compromise the observation location.



# AD Auto Iris Lenses


DATA SHEET

## Specifications

Model Numbers	Focal Length	Aperture (f Stop)	Lens Format	Mount	View Angle		Minimum Object Distance	Filter Screw Size	Weight	Size Diameter x Length)
					Horizontal	Vertical				
<b>Fixed Focal Length - DC Iris</b>										
LD2616CS	2.6 mm	f1.6 - 360	1/3-inch	CS	98.7°	74.9°	0.1 M	NA	47 g	32 x 34.7 mm
LD0412CS	4.0 mm	f1.2 - 360	1/3-inch	CS	63.9°	49.1°	0.2 M	30.5 X 0.5 mm	38 g	32 x 33 mm
LD0812CS	8.0 mm	f1.2 - 360	1/3-inch	CS	34.7°	25.9°	0.2 M	30.5 X 0.5 mm	39 g	32 x 33 mm
LD3616CS	3.6 mm	f1.6 - 360	1/2-inch	CS	99.2°	74.1°	0.2 M	30.5 X 0.5 mm	40 g	32 x 33 mm
LD0614CS	6.0 mm	f1.4 - 360	1/2-inch	CS	58.3°	44.3°	0.2 M	30.5 X 0.5 mm	37 g	32 x 33 mm
LD1214CS	12.0 mm	f1.4 - 360	1/2-inch	CS	30.4°	23.1°	0.3 M	30.5 X 0.5 mm	35 g	32 x 33 mm
<b>Variable Focal Length - DC Iris</b>										
LD35814CS	3.5 - 8 mm	f1.4 - 360	1/3-inch	CS	77.5° - 35.4°	57.6° - 26.6°	0.4 M	NA	48 g	34 x 43.5 mm

### Ordering Note

All DC lenses are terminated with a standard 4-pin DC iris connector for direct connection to all AD cameras (refer to figure).

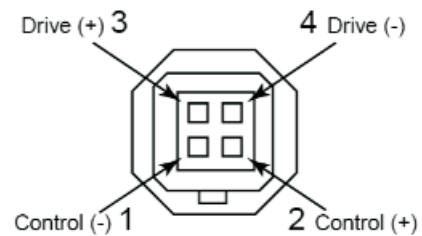

*DC Iris Connector Details  
(solder side of connector)*

For further information on how we can help you, contact your local ADT office:

**Austria - ADT Austria**  
Tel: 662 45 24 60 11  
Website: www.adteurope.com

**Belgium - ADT Security Services SA**  
Tel: 02 481 08 00  
Website: www.adt-belgium.be

**Czech Republik - ADT Security Center s.r.o.**  
Tel: 267 267 267  
Website: www.adt-sc.cz

**Denmark - ADT A/S**  
Tel: 70 80 70 00  
Website: www.adt-nordic.com

**Germany - ADT Deutschland GmbH**  
Tel: 0800 7070 238  
Website: www.adt-deutschland.de

**Greece - ADT Greece SA**  
Tel: 210 92 43 400  
Website: www.adt.gr

**Hungary - ADT Hungary**  
Tel: +36 14303700  
Website: www.adthungary.com

**Ireland - ADT Fire and Security plc**  
Tel: 1620 5888  
Website: www.adt.ie

**Italy - ADT Italy**  
Tel: 02 818061  
Website: www.adtitaly.com

**The Netherlands - ADT Security Services B.V.**  
Tel: 010 258 4848  
Website: www.adt-security.nl

**Poland - ADT Poland Sp. Z o.o.**  
Tel: 0 801 801 238  
Website: www.adt.pl

**Portugal - ADT Portugal**  
Tel: 217 510 560  
Website: www.adt-pt.com

**Russia - ADT Russia**  
Tel: +7 (495) 661 2094  
Website: www.adtrussia.com

**Spain - ADT Servicios de Seguridad SL**  
Tel: 902 444 440  
Website: www.adt-es.com

**Sweden - ADT AB**  
Tel: 8 40 00 70 00  
Website: www.adt-nordic.com

**Switzerland - ADT Switzerland**  
Tel: 0848 40 08 01  
Website: www.adt-ch.com

**United Kingdom - ADT Fire & Security plc**  
Tel: 0800 010 999  
Website: www.adt.co.uk

