



AD Zoom Lenses

Features:

- 1/3-inch
- High quality, compact design
- C and CS mounts available
- Colour corrected optics
- Long life drive motors
- 12X Zoom
- Available with preset options
- Built-in auto iris EE amplifiers, camera driven DC auto iris and 3-motor versions available
- Motor-driven iris version

AD colour corrected, vibration resistant, high quality zoom lenses provides cost-effective solutions for diverse view requirements. These lenses, with their compact configuration, are available with both C and CS mounts.

Focus and zoom drives use high quality, long life motors with protective clutch assemblies that prevent damage. Iris control is accomplished by automatic galvanometer movement, gear drive, or where operator control is necessary, motor drive.

AD Zoom Lenses


Specifications

Model Numbers	Focal Length	Aperture (f-Stop)	Zoom Ratio	Iris Control	Lens Format	Mount	Presets
LZ067212A	6 - 72 mm	f1.2 - 360	12X	DC Drive	1/3-inch	CS	No

View Angle	Minimum Object Distance	Filter Screw Size	Weight
Horizontal Vertical	43.1o - 3.9o 32.6o - 2.9o	1.5 M	49 x 0.75 mm 460 g

Lens Series	LZ067212A
A	104.5 mm
B	69 mm
C	62 mm
D	74.1 mm
E	38 mm
F	59.5 mm

Diagram 1

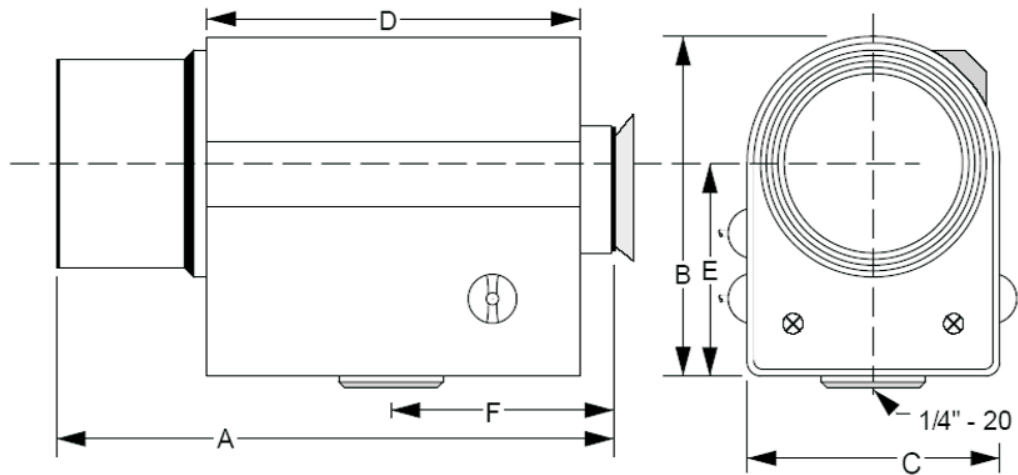

Motor Specifications

Control Voltage	12 VDC
Current	50 mA
Zoom Travel Time	4 - 6 seconds

For further information on how ADT can help you, contact your local office or phone free on **0800 010 999** or visit us at www.adt.co.uk

CE

Head Office: ADT Fire and Security plc, Security House, The Summit, Hanworth Road, Sunbury-on-Thames, Middlesex TW16 5DB.
 ADT and ADT Always There is a registered trademark of ADT Services AG and used under license.
 ADT reserves the right to modify or withdraw any product or service without notice.

Ref No PSS125A Issue 2 July 2006

© 2006 Tyco International



ADT Always There®