



Hay-Metro

Side Opening Camera Housing

Features

- Cost effective
- Simple , quick installation due to Side Opening feature
- Cable management,
- IP67 rated , suitable for Internal & External installations
- Choice of mains or low voltage versions
- Range of accessories for a variety of installations

This camera housing features an innovative side opening mechanism to allow a simple and quick installation and easy maintenance.


There is a mains powered and low voltage version. It is IP67 rated and is therefore suitable for internal and external installations.

It features a fully cable managed bracket which assists in providing an aesthetic installation and secure installation.

There are a number of accessories available to allow alternatives to wall mounting.

This product also offers a 3 year anti corrosion warranty.

SPECIFICATIONS

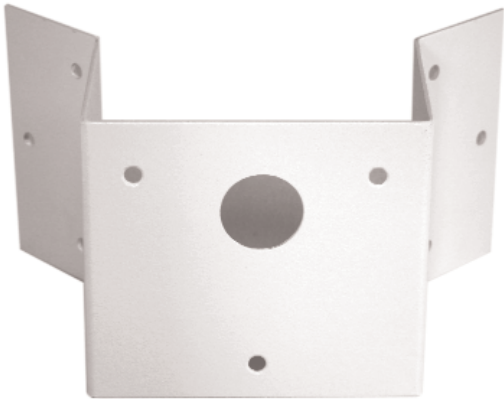

Hay-Metro Corner Bracket
Corner Wall Bracket for the Metro

Hay-Metro - 450mm Ext Arm

450mm Extension Arm fully cable managed C/W fittings



Hay-Metro - Polemount

Pole mount Adapter completewith 2 clampsfor pole sizes (1) 67mm - 127mm & (2) 83mm - 178mm

Hay-Metro - Dummt Kit

Dummy Camera including lens for mounting inside the Metro housing

Ordering Information

HAY-METRO230-ADT	Housing 230V Cable managed
HAY-METRO LV-ADT	Housing 12/24V Cable managed
HAY-METRO/HEATER	230V Heater for Metro 230V
HAY-METRO/HEATLV	12/24V Heater for Metro 12/24V
HAY-METRO-450	450MM Bracket ext. for Metro
HAY-METRODK	Dummy Cam Kit for Metro
HAY-METROPM	Pole Mount for Metro
HAY-METRO CB	Corner Mount for Metro

For further information on how we can help you please visit our website at www.tycofis.com or e-mail us on tycofis@tycoint.com. The right is reserved to modify or withdraw any product or service without notice. PSS326TFIS Issue 1 January 2010 © 2010

a vital part of your world

tyco

*Fire & Integrated
Solutions*