



## EV105

PIR Detector with 7 curtains of 12 m

### Features:

- Passive Infra Red motion sensor
- "Step & Gliding Focus Multi Curtain" mirror optic
- Plug-in electronics
- Sealed optics
- ASIC with "4D" processing
- Selectable range with full undercrawl detection
- Additional bi-curtain processing for harsh environment
- No adjustment required for different mounting heights
- Tolerates wall angle deviation
- Complies with EN50131-2-2
- Several European approvals

The EV105 has been designed specifically for short range Commercial applications. Details such as the plug-in electronics allow rapid wiring while the Gliding Focus Curtains ensure that you have simple commissioning with perfect detection every time, without the need for time consuming alignment. The EV105 enables rapid installation, provides sharp detection every time while guaranteeing excellent false alarm immunity with the highest quality.



## Volumetric Curtains of Detection

Benefiting from the success of the EV series PIRs, the EV105 also features solid curtains of detection. Full undercrawl protection gives maximum security while the special characteristics of a "curtain" ensures not only better intruder detection but also better PIR stability from the environment.

## "4D" Signal processing


4D signal processing is the latest generation of PIR processing taken from the EV 400 Plus. 4D allows the PIR processing to intelligently analyse a signal pattern and distinguish between real human movement and false alarm hazards. The PIR processing is resistant to false alarms by analysing the size, shape and speed of successive signals.

## True Range Control

The EV105 is able to adjust the PIR range. Due to the strength of the Gliding Focus Curtain Mirror, it is possible to reduce how hard the detector is working in smaller rooms, making the detector even more stable, without compromising its excellent detection.

## Accessory

A wall and ceiling mount bracket is available providing flexibility to install and aim the detector where required.

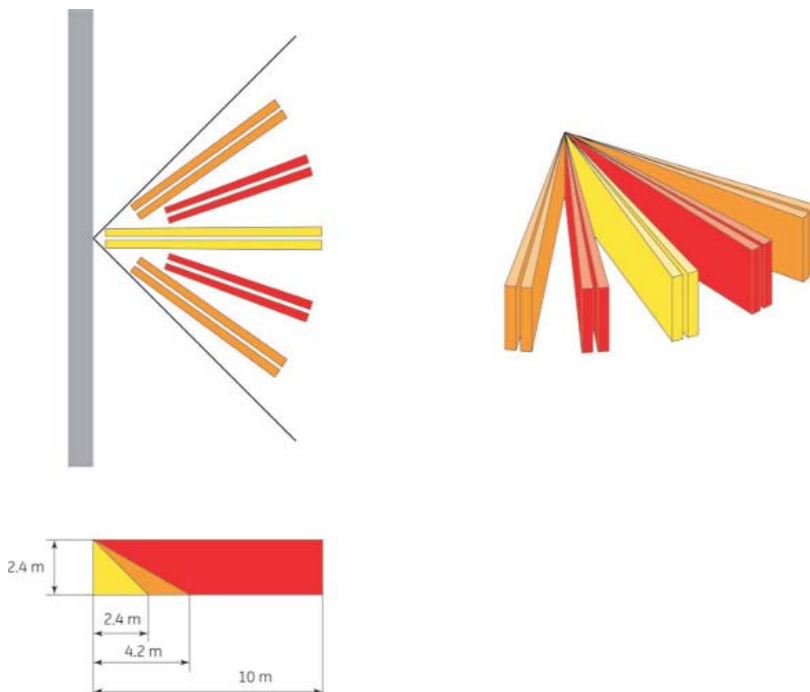

## Specifications

Detection range	12 m
Undercrawl protection	Yes
Detection range selection	12 m or 7 m
Coverage field of view	86° with 7 curtains
Coverage pattern selection	Undercrawl blinder
Mounting height	1.8 to 3.0 m
Power supply	9 to 15 VDC
Current consumption (nom.)	4.5 mA
Alarm relay (voltage free)	NC when energised
Tamper relay (voltage free)	NC when cover closed
Remote control lines	Walk test
Alarm memory	No
PIR process mode	Standard / Bi-curtain
Dimensions (W x H x D)	51 x 98 x 47 mm
Ambient conditions	-10 to +55°C; 95% relative humidity
Pry-off tamper	ST400 (optional)
EN50131-2-2	Grade 2

## Ordering Information

EV105S70	"Step & Gliding Focus Multi Curtain" mirror optics passive infra red detector, wide angle (86° with 7 curtains) selectable range 12m or 7m, NC relay
----------	--

For further information on how ADT can help you, contact your local office or phone free on **0800 010 999** or visit us at [www.adt.co.uk](http://www.adt.co.uk)



Head Office: ADT Fire and Security plc, Security House, The Summit, Hanworth Road, Sunbury-on-Thames, Middlesex TW16 5DB.  
ADT and ADT Always There is a registered trademark of ADT Services AG and used under license.  
ADT reserves the right to modify or withdraw any product or service without notice.

Ref No PSI288A Issue 1 March 2009

© 2009 Tyco International



**ADT Always There®**