




Small Public Address Systems

30 Watt 3 Inputs Amplifier -
2571/001

Features:

- Output power - 30W/100V line 4 Ohms/8 Ohms
- Inputs - 3 Inputs - MIC1, MIC2, AUX & Telephone input
MIC inputs have both XLR and 1/4" jacks
- Muting for priority - Input MIC1 has automatic priority over MIC2 and AUX (defeatable) Telephone Input has automatic priority over all other inputs
- Remote chime activation

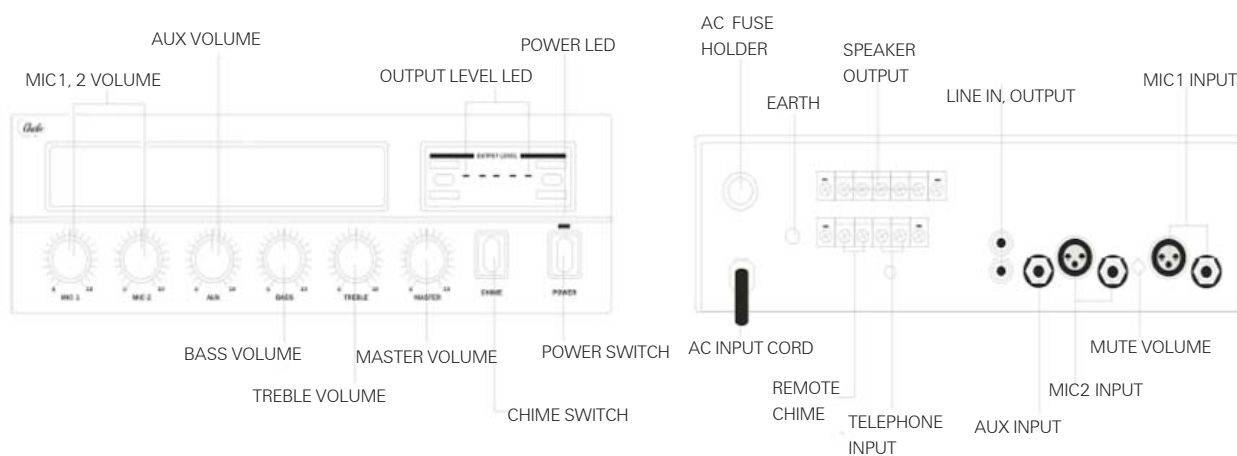

30 Watt 3 Inputs Amplifier - 2571/001

DATA SHEET

2571/001 - 30 Watt Amplifier with 3 inputs

Technical Specifications

Rated power output (THD 1%)	30W
Output level/impedance	
(transformer)	100V/333 Ohms, 15V/8 Ohms, 11V/4 Ohms
Pre-amp output	IV/600 Ohms
Input sensitivity/impedance	
MIC 1, 2	Jack 1mV/600 Ohms XLR 0.3mV/600 Ohms
AUX	100mV/10k Ohms
Amp in	1V/10k Ohms
Telephone In	0.775V/600 Ohms
Frequency response	80Hz ~ 5kHz
Tone Control	
Treble (10KHz)	±10dB
Bass (100KHz)	±10dB
Power source	AC230V 50Hz
Dimensions	300(W) x 88(H) x 260(D) mm
Weight	4.6kg

For further information on how ADT can help you, contact your local office or phone free on **0800 010 999** or visit us at www.adt.co.uk

Head Office: ADT Fire and Security plc, Security House, The Summit, Hanworth Road, Sunbury-on-Thames, Middlesex TW16 5DB.

ADT and the ADT logo are registered trademarks of ADT Services AG and are used under license.

ADT reserves the right to modify or withdraw any product or service without notice.



tyco / Fire &
Security



Ref No PSPV055A Issue 1 March 2007

© 2007 Tyco Fire & Security plc