


**MicroDrop<sup>®</sup>**

Kg/cm<sup>2</sup>



**SA 740**

Pressure/ temperature:

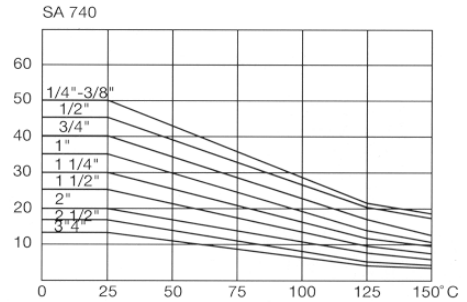


**PN 30**  
**BRASS**


**TYPE BASIC**  
**FULL BORE VALVE**

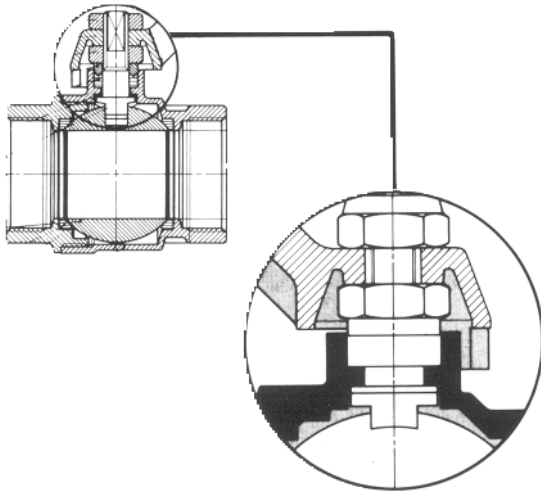


SA 741  
1/2" -2"




SA 741 S  
1/2"-2"




SA 740U  
1/2"-2"




SA 744S  
1/2"-2"




SA 742  
1/4"-2"




SA 743  
1/2"-1 "



SA 744T  
1/2 " -1 "



SA 745  
1/2" – 1"



SA 746  
1/2" – 1"

Temperature rate:  
-20°C-+150°C

Application:

Water, oil, petrolium, air and non aggressive chemicals