





Small Public Address Systems

60 Watt 3 Inputs Amplifier - 2571/002

Features:

- Output power - 60W/100V line 4 Ohms
- Inputs - 3 MIC Inputs
2 AUX Inputs
- Tone Control
- Muting for priority - Input MIC1 has automatic priority over other inputs (defeatable)

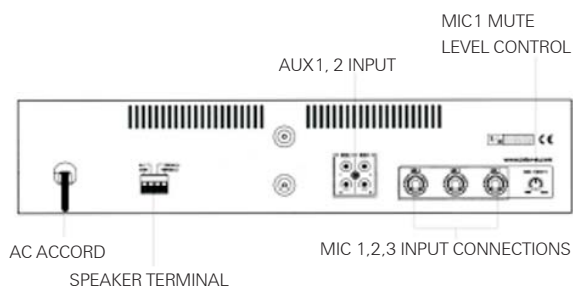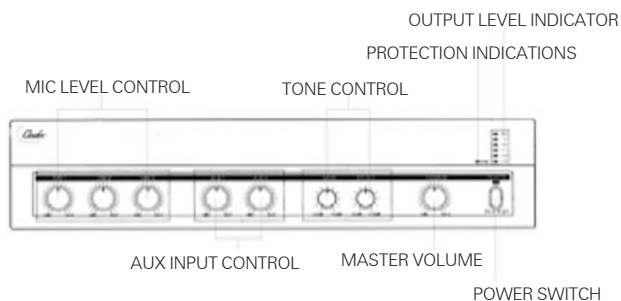

60 Watt 3 Inputs Amplifier - 2571/002

DATA SHEET

2571/002 - 60 Watt Amplifier with 3 inputs

Used in our "Audix System B" package for your "off the shelf" Public Address solution

Technical Specifications

Power output	70V/100V/4 Ohms
Frequency response	80Hz ~ 16KHz
Total Harmonic distortion	Less than 1%
Input sensitivity/impedance	
MIC 1~3	60dB/600 Ohms Balanced
AUX	10dB/10k Ohms Unbalanced
Tone Control	
High (10KHz)	± 12dB
Low (100Hz)	±12dB
Power source	AC230V 50Hz
Power Consumption	75W
Dimensions	420(W) x 88(H) x 320(D) mm
Weight	8.9kg

For further information on how ADT can help you, contact your local office or phone free on **0800 010 999** or visit us at www.adt.co.uk

Head Office: ADT Fire and Security plc, Security House, The Summit, Hanworth Road, Sunbury-on-Thames, Middlesex TW16 5DB.

ADT and the ADT logo are registered trademarks of ADT Services AG and are used under license.

ADT reserves the right to modify or withdraw any product or service without notice.



tyco / Fire &
Security

